



DYNAMIC FASTENERS

CONSTRUCTION & SAFETY PRODUCTS


2026



DYNAMIC FASTENERS

INDEX

- Page 04 - Bottom Plate Anchors
- Page 05 - Seismics Anchors -
- Page 06 - Screw Anchors/Bolts
- Page 07 - Economy Screws Bolts
- Page 08 - Strike Anchors
- Page 09 - Builders Hardware
- Page 10 - Bolts/Nuts/Washers/Rod
- Page 11 - Screws
- Page 12 - Ecko Jolt Screw
- Page 13 - Ecko Jolt Screw
- Page 14 - Blue Purlin Screw
- Page 15 - Decking Screws
- Page 16 - Decking Screws
- Page 17 - Bugle Head Batten Screw
- Page 18 - Wafer Head Construction Screw
- Page 19 - CSK Head Construction Screw
- Page 20 - T17 Hex Washer Face Screws
- Page 21 - Gun Nails
- Page 22 - Coil Nails
- Page 23 - Air Tools
- Page 24 - Brads
- Page 25 - Sealants
- Page 26 - Sealants
- Page 27 - Sealants
- Page 28 - Sealants
- Page 29 - Uni Wrap
- Page 30 - Barricade Wrap
- Page 31 - PEF Rod
- Page 32 - Flashing Tape
- Page 33 - Building Wrap
- Page 34 - Safety - First Aid kit & Fire extinguisher
- Page 35 - Safety - Dura Mesh fence
- Page 36 - Safety - Head protection
- Page 37 - Safety - Head protection
- Page 38 - Safety - Hand & Face protection
- Page 39 - Safety - Eye protection
- Page 40 - Safety - Hand protection
- Page 41 - Safety - Disposable respirator
- Page 42 - Safety - Full face mask
- Page 43 - Safety - Half face mask
- Page 44 - Safety - Air filters
- Page 45 - Safety - Asbestos Removal

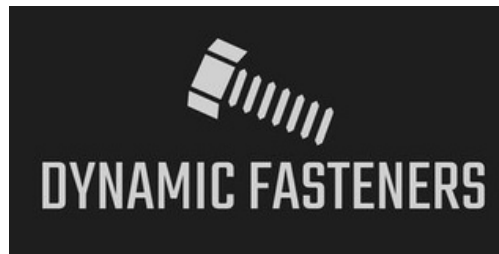

Introducing Dynamic Fasteners - We understand the critical role that reliable fasteners play in ensuring the success and longevity of your projects. With over 20 years of experience in the industry, we have developed a reputation for providing top-notch products that meet the highest standards of quality, durability, and performance.

Here's why you should consider Dynamic Fasteners as your preferred fasteners supplier:

Diverse Product Range: We offer a comprehensive selection of fasteners and anchors, including construction hardware, cutting and drilling tools, sealants, adhesives, building wraps, tapes AND safety gear.

Reliable Delivery: Time is of the essence in your industry, and we pride ourselves on our efficient and timely delivery services. Count on us to provide the fasteners you need, precisely when you need them. Our deliveries around Auckland are free of charge.



PROUD EMPLOYER OF
FIRE AND EMERGENCY
VOLUNTEERS



HE RŌPŪ KOTAHI TĀTOU



DYNAMIC FASTENERS

**NEWLY
ADDED!**

▪ **SCREW BOLT w/ SQUARE WASHER MECHANICAL GALV**

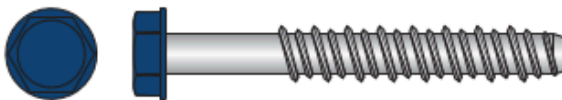

M10 x 140mm, Blue Head
For 15kN Bottom Plate Fixing

*Washers, socket & drill bit only included in
SBGXM10140SW-50

M10 x 150mm, Blue Head
For 15kN Bottom Plate Fixing
(Frame Packer)


*Washers, socket & drill bit only included in
SBGXM10150SW-50

M10 x 155mm, Orange Head
For 15kN Bottom Plate Fixing
(Insulated Slab)

*Washers, socket & drill bit only included in
SBGXM10155SW-50

▪ **THROUGH BOLT w/ SQUARE WASHER HD GALV M12 x 135mm**

*Washers and drill bit only included in TBGM12135SW-25 & TBGM12135SW-50

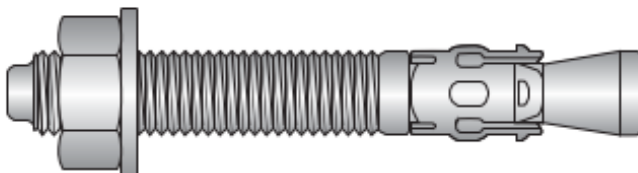



DYNAMIC FASTENERS

Seismic Rated Anchors

Thunderbolt® PRO



ICCONS®
Serious Connections®

SCREW-BOLT ANCHOR

TDS | 1032.11



Thunderbolt® PRO Hex Head




Ceiling Angle Bracket

Refer to ICCONS product guide (IPG) for further details.



1/2" Impact Sockets

Refer to ICCONS product guide (IPG) for further details.



**Thunderbolt® PRO Hex Head
Stainless Steel**



Ceiling Angle Bracket

Refer to ICCONS product guide (IPG) for further details.



1/2" Impact Sockets

Refer to ICCONS product guide (IPG) for further details.



Contact us with sizes and quantities required

Seismic Rated Anchors



ThunderBolt®Pro SXTM Hex ETA



ATS EVO Heavy Duty Safety Bolt - Hex Head

100 Year Design Life
Pure Epoxy

Pure Epoxy

Hybrid

Vinylester

PolyPRO

Capsules

• Highest International Assessment and National Code Compliant Adhesives
• Easy select colour range - Red, Platinum, Green, Blue & Gold
• Clear, easy to understand labelling
• Cracked Concrete and Seismic Solutions
• 100 Year Design Life Adhesive (BIS-PE GEN3)

COMPLIES WITH
AS 5216
FOR POST-INSTALLED
FASTENINGS

Economy Screw Bolts



Non - Structural Screw Bolts - Great for temporary anchoring and anchoring of bollards and signs into concrete.

Available in diameters from M6 to M16

Lengths upto 150mm



friulsider X1® The Absolute Plug



NEW



Part No.	Description	mm	mm	mm	metric	qty	qty
FMX1P05025 (60070005025)	5 x 25mm Plug only	5	25	3.5 - 4	n/a	100	3200
FMX1P06030 (60070006030)	6 x 30mm Plug only	6	30	4.5	M4	100	3200
FMX1P08040 (60070008040)	8 x 40mm Plug only	8	40	5 - 6	M5	100	1600
FMX1P10050 (60070010050)	10 x 50mm Plug only	10	50	6	M6	50	800
FMX1P12060 (60070012060)	12 x 60mm Plug only	12	60	8	M8	25	400
FMX1P14070 (60070014070)	14 x 70mm Plug only	14	70	10	M10	20	320

Strike anchor until flush

Pre-expanded bent section compresses against hole wall



Carbon Steel
Mechanically
Galvanised

316 (A4)
Stainless Steel

Carbon Steel
Mechanically
Galvanised

Carbon Steel
Zinc Clear

Mushroom Head

Mushroom Head

Countersunk

Tie-Wire



ICCONS® Strike™ anchor is available in both Carbon Steel Class 10.9 and 316 (A4) Stainless Steel.

Suitable for solid base materials such as concrete, block (core filled), solid brick, or stone, this unique style anchor creates compressive forces against the wall of the hole as it is driven in, this is achieved by the proprietary pre-expanded bend at the working end. The anchor is set by striking with a hammer until flush with the fixture material.

The Mushroom Head & Countersunk Strike™ are the choice for applications that require ease of installation, simple clean aesthetic look or even for tamper proof applications. The Tie wire Strike™ is the ideal choice for suspension of electrical cabling catenary wire, suspended ceilings and signage.



▶ FM-X5® Multi-expansion long plug



NAUTILUS

INDEX A4-70




Assembled
countersunk head screw
Ø 8 Torx T30 recess
Ø10 Torx T40 recess

White zinc plated Code	NAUTILUS matte finish Code	Stainless steel A4-70 Code	Plug Ø x L	Screw Ø x L	Fixing thickness max	Pkg.	Outerbox
64301b08080	64301c08080▲	64301008080	8x80	6x85	10	100	1000
64301b08100	64301c08100▲	64301008100	8x100	6x105	30	50	500
64301b08120	64301c08120▲	64301008120	8x120	6x125	50	50	500
64301b08150	64301c08150▲	64301008150	8x150	6x155	80	50	200
64301b08170	64301c08170▲	64301008170	8x170	6x175	100	50	-
64301b10085	64301c10085▲	64301010085	10x85	7x90	15	50	500
64301b10100	64301c10100▲	64301010100	10x100	7x105	30	50	500
64301b10115	64301c10115▲	64301010115	10x115	7x120	45	50	500
64301b10135	64301c10135▲	64301010135	10x135	7x140	65	50	200
64301b10160	64301c10160▲	64301010160	10x160	7x165	90	50	-
64301b10200	64301c10200▲	64301010200	10x200	7x205	130	50	-
64301b10230	64301c10230▲	64301010230	10x230	7x235	160	50	-



DYNAMIC FASTENERS

Approved Builders Hardware

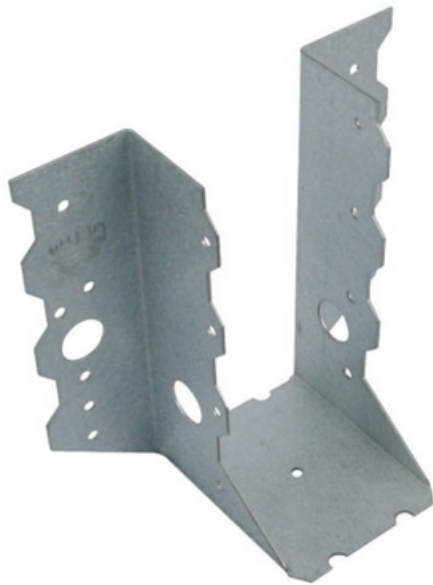

Makes your job easier, everyday





DYNAMIC FASTENERS

**Bolts, Nuts, Threaded Rods and Washers -
Stainless & Galvanized**





DYNAMIC FASTENERS

Screws - Self tapping/drill

Self Drilling Screws
Pan - Phillips Drive



Self Drilling Screws
Pan - Square



Self Drilling Screws
Wafer Head - Phillips



Self Drilling Screws
Wafer Head - Square



Self Drilling Screws
Wing Tek - Phillips



Self Drilling Screws
Wing Tek - Square



Self Tapping Screws
Pan Head - Pozi



Self Tapping Screws
Pan Head - Square



Self Tapping Screws
Pan Head - Square - Type 17




DYNAMIC FASTENERS

ECKO T-REX17®

JOLTSCREW

Jolt Head TX Drive - OutDoor XGuard & 316 S/Steel

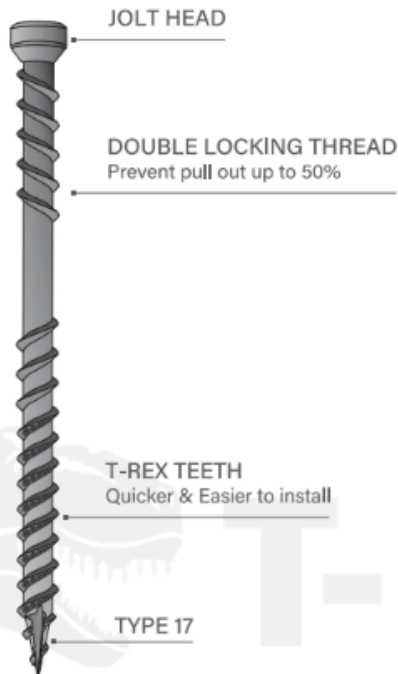

■ Features & Benefits

- **HEAD**
Jolt Head - A small head (5mm) for applications where the head is required to be concealed
- **DRIVE**
T15 TX drive
- **FINISH**
OutDoor XGuard & 316 S/Steel.
- **T-REX TEETH**
Quicker & Easier to install
- **DOUBLE LOCKING THREAD**
Prevent pull out up to 50%
- **TYPE 17**
Self-piercing predrilling
- **ENDORSEMENT**



OutDoor XGuard Premium Coating. Salt Spray Test exceeds 1000 hours. Independently tested in New Zealand.

- **PACK SIZE**
Available in 250 & 500pcs (*250pcs only available in 90mm)



■ HOLDING POWER

JoltScrew has 6 times more holding power than jolt head nail.

DIA.	LENGTH (mm)	PRODUCT CODE	DRIVE	FINISH	T-REX TEETH	POINT	PCS/PACK
OutDoor XGuard							
8G	65	WDJC48G65-500	TX Drive T15	XGuard	✓	Type 17	500
	75	WDJC48G75-500	TX Drive T15	XGuard	✓	Type 17	500
	90	WDJC48G90-250	TX Drive T15	XGuard	✓	Type 17	250
316 Stainless Steel							
8G	65	WDJ3168G65-500	TX Drive T15	316 S/Steel	✓	Type 17	500
	75	WDJ3168G75-500	TX Drive T15	316 S/Steel	✓	Type 17	500
	90	WDJ3168G90-250	TX Drive T15	316 S/Steel	✓	Type 17	250

DYNAMIC FASTENERS

ECKO T-REX17® JOLTSCREW

Jolt Head TX Drive - 316 S/Steel Bronze



JOLT HEAD

DOUBLE LOCKING THREAD
Prevent pull out up to 50%

T-REX TEETH
Quicker & Easier to install

TYPE 17



DRIVER BIT
INCLUDED

ECKO-FRIENDLY
PACKAGING

Features & Benefits

- HEAD**
Jolt Head - A small head (5mm) for applications where the head is required to be concealed
- DRIVE**
T15 TX drive
- FINISH**
316 S/Steel Bronze
- T-REX TEETH**
Quicker & Easier to install
- DOUBLE LOCKING THREAD**
Prevent pull out up to 50%
- TYPE 17**
Self-piercing predrilling
- PACK SIZE**
Available in 400pcs



HOLDING POWER

JoltScrew has 6 times more holding power than jolt head nail.



SCAN THE CODE



FOR MORE INFO

DIA	LENGTH (mm)	PRODUCT CODE	DRIVE	FINISH	T-REX TEETH	POINT	PCS/PACK	PACK / OUTER	GS1 BARCODE
316 Stainless Steel Bronze									
8G	75	WDJBZ8G75-400	TX Drive T15	316 S/Steel Bronze	✓	Type 17	400	5	9420051806795



DYNAMIC FASTENERS

ECKO T-REX17[®] **PURLIN SCREWS**

New & Improved Design
Used for Batten & Purlin Fixing



**WITH A MASSIVE 5.37KN HOLDING POWER
IT MEETS & BEATS NZ STANDARDS.**

DECKING SCREWS

ECKO T-REX17®

DECKING SCREWS

Countersunk Head TX Drive - 304 S/Steel



T25 TX DRIVE

COUNTERSUNK



DOUBLE LOCKING THREAD
Prevent pull out up to 50%

COARSE THREAD
High strength engagement

T-REX TEETH
Quicker & Easier to install

TYPE 17

ECKO T-REX17®

DECKING SCREWS

Oval Head TX Drive - 304 S/Steel



T25 TX DRIVE

OVAL HEAD




DOUBLE LOCKING THREAD
Prevent pull out up to 50%

COARSE THREAD
High strength engagement

T-REX TEETH
Quicker & Easier to install

TYPE 17

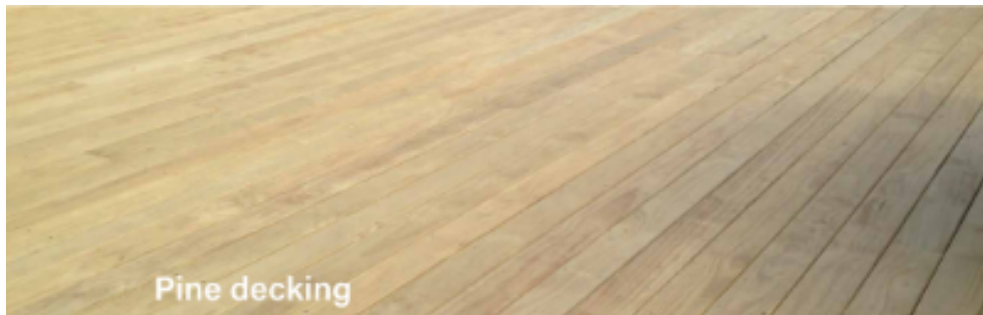

Pine decking

AVAILABLE IN 10g x 60mm, 65mm & 75mm

ECKO T-REX17®

DECKING SCREWS

Trim Head TX Drive - 316 S/Steel



DRIVER BIT INCLUDED



ECKO-FRIENDLY PACKAGING

Features & Benefits

- HEAD**
Trim Head
- DRIVE**
T20 TX drive (10G)
T25 TX drive (12G)
- FINISH**
316 S/Steel
- DOUBLE LOCKING THREAD**
Prevent pull out up to 50%
- T-REX TEETH**
Quicker & Easier to install
- REVERSE TIP**
Minimizes splitting




ENDORSEMENT

Endorsed by




- PACK SIZE**
Available in 50, 250, 500 & 1000pcs

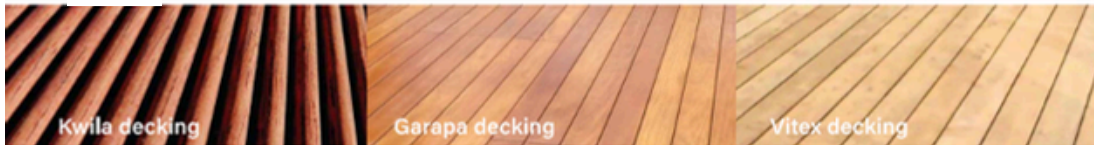

ECKO T-REX17®

DECKING SCREWS

Cylindrical Head TX Drive - 316 S/Steel

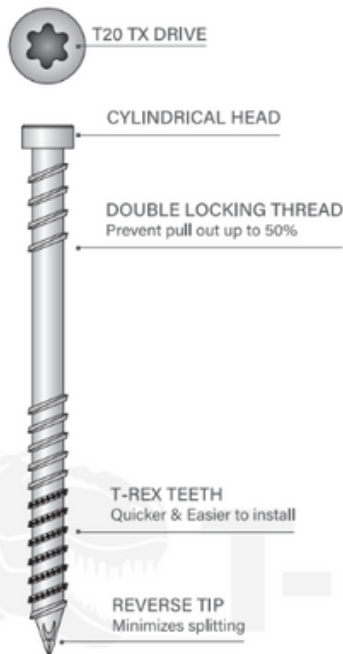


ECKO T-REX17®



TimbaTX® MULTI-PURPOSE SCREWS

Countersunk Head TX Drive - Yellow Zinc

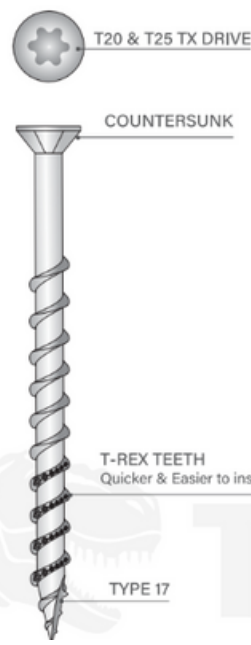


OutDoor XGuard Premium Coating.
Salt Spray Test exceeds 1000 hours.
Independently tested in New Zealand.



ECKO T-REX17®

BATTEN SCREWS

Bugle Head Hex Drive - OutDoor XGuard & 316 S/Steel

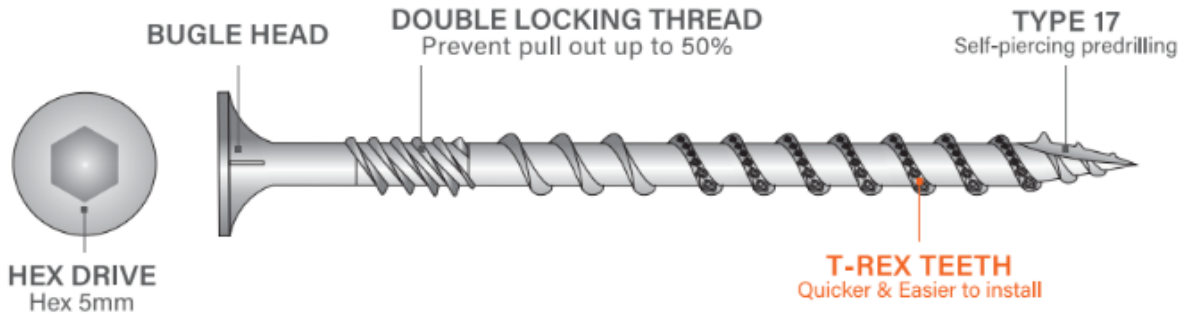

DIA	LENGTH (mm)	PRODUCT CODE	DRIVE	FINISH	T-REX TEETH	POINT	PCS/PACK	PACK / OUTER	GS1 BARCODE
OutDoor XGuard									
14G	50	BBC414G50L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801394
	50	BBC414G50L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801486
	65	BBC414G65L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801400
	65	BBC414G65L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801493
	75	BBC414G75L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801417
	75	BBC414G75L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801509
	75	BBC414G75L-250	Hex 5mm	XGuard	✓	Type 17	250	4	9420051801592
	75	BBC414G75L-500	Hex 5mm	XGuard	✓	Type 17	500	1	9420051801684
	90	BBC414G90L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801424
	90	BBC414G90L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801516
	90	BBC414G90L-250	Hex 5mm	XGuard	✓	Type 17	250	4	9420051801608
	90	BBC414G90L-500	Hex 5mm	XGuard	✓	Type 17	500	1	9420051801691
	100	BBC414G100L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801431
	100	BBC414G100L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801523
	100	BBC414G100L-250	Hex 5mm	XGuard	✓	Type 17	250	4	9420051801615
	100	BBC414G100L-500	Hex 5mm	XGuard	✓	Type 17	500	1	9420051801707
	125	BBC414G125L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801448
	125	BBC414G125L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801530
	125	BBC414G125L-250	Hex 5mm	XGuard	✓	Type 17	250	4	9420051801622
	125	BBC414G125L-500	Hex 5mm	XGuard	✓	Type 17	500	1	9420051801714
150	BBC414G150L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801455	
150	BBC414G150L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801547	
150	BBC414G150L-250	Hex 5mm	XGuard	✓	Type 17	250	4	9420051801639	
150	BBC414G150L-500	Hex 5mm	XGuard	✓	Type 17	500	1	9420051801721	
200	BBC414G200L-25	Hex 5mm	XGuard	✓	Type 17	25	6	9420051801479	
200	BBC414G200L-100	Hex 5mm	XGuard	✓	Type 17	100	5	9420051801561	
316 Stainless Steel									
14G	75	BBSS14G75-25	Hex 5mm	316 S/Steel	✓	Type 17	25	6	9420051801776
	75	BBSS14G75-100	Hex 5mm	316 S/Steel	✓	Type 17	100	5	9420051801851
	75	BBSS14G75-250	Hex 5mm	316 S/Steel	✓	Type 17	250	4	9420051802407
	75	BBSS14G75-500	Hex 5mm	316 S/Steel	✓	Type 17	500	1	9420051801936
	90	BBSS14G90-25	Hex 5mm	316 S/Steel	✓	Type 17	25	6	9420051801783
	90	BBSS14G90-100	Hex 5mm	316 S/Steel	✓	Type 17	100	5	9420051801868
	90	BBSS14G90-250	Hex 5mm	316 S/Steel	✓	Type 17	250	4	9420051802414
	90	BBSS14G90-500	Hex 5mm	316 S/Steel	✓	Type 17	500	1	9420051801943
	100	BBSS14G100-25	Hex 5mm	316 S/Steel	✓	Type 17	25	6	9420051801790
	100	BBSS14G100-100	Hex 5mm	316 S/Steel	✓	Type 17	100	5	9420051801875
	100	BBSS14G100-250	Hex 5mm	316 S/Steel	✓	Type 17	250	4	9420051802421
	100	BBSS14G100-500	Hex 5mm	316 S/Steel	✓	Type 17	500	1	9420051801950
	125	BBSS14G125-25	Hex 5mm	316 S/Steel	✓	Type 17	25	6	9420051801806
	125	BBSS14G125-100	Hex 5mm	316 S/Steel	✓	Type 17	100	5	9420051801882
	125	BBSS14G125-250	Hex 5mm	316 S/Steel	✓	Type 17	250	4	9420051802438
	125	BBSS14G125-500	Hex 5mm	316 S/Steel	✓	Type 17	500	1	9420051801967
	150	BBSS14G150-25	Hex 5mm	316 S/Steel	✓	Type 17	25	6	9420051801813
	150	BBSS14G150-100	Hex 5mm	316 S/Steel	✓	Type 17	100	5	9420051801899
	150	BBSS14G150-250	Hex 5mm	316 S/Steel	✓	Type 17	250	4	9420051802445
	150	BBSS14G150-500	Hex 5mm	316 S/Steel	✓	Type 17	500	1	9420051801974

ECKO T-REX17®



CONSTRUCTION SCREWS

Wafer Head TX Drive - OutDoor XGuard



ECKO-FRIENDLY
PACKAGING

DRIVER BIT
EXCLUDED

■ Features & Benefits

- **HEAD**
Wafer Head
- **DRIVE**
TX drive. Allows higher torque transmission than other drive systems enabling fastenings to be tighter and therefore more secure.
- **DOUBLE LOCKING THREAD**
Prevent pull out up to 50%
- **T-REX TEETH**
Quicker & Easier to install
- **TYPE 17**
Self-piercing predrilling
- **FINISH**
OutDoor XGuard



OutDoor XGuard Premium Coating.
Salt Spray Test exceeds 1000 hours.
Independently tested in New Zealand.

DIA.	LENGTH (mm)	PRODUCT CODE	DRIVE	FINISH	T-REX TEETH	POINT	PCS/PACK	GS1 BARCODE
OutDoor XGuard								
M6	80	TCWM680L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802926
	100	TCWM6100L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802933
	120	TCWM6120L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802940
	140	TCWM6140L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802957
	160	TCWM6160L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802964
	180	TCWM6180L-100	TX Drive T30	XGuard	✓	Type 17	100	9420051802971
M8	80	TCWM880L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051802988
	100	TCWM8100L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051802995
	120	TCWM8120L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051803008
	140	TCWM8140L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051803015
	160	TCWM8160L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051803022
	180	TCWM8180L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051803039
M10	200	TCWM8200L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051803046
	80	TCWM1080L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051803053
	100	TCWM10100L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051803060
	120	TCWM10120L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051803077
	140	TCWM10140L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803084
	160	TCWM10160L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803091
	180	TCWM10180L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803107
	200	TCWM10200L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803114
	220	TCWM10220L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803121
	240	TCWM10240L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803138
260	TCWM10260L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803145	
280	TCWM10280L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803152	
300	TCWM10300L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803169	
360	TCWM10360L-25	TX Drive T50	XGuard	✓	Type 17	25	9420051803176	

ECKO T-REX17[®]

CONSTRUCTION SCREWS

Countersunk Head TX Drive - OutDoor XGuard



TX DRIVE



COUNTERSUNK

DOUBLE LOCKING THREAD
Prevent pull out up to 50%

T-REX TEETH
Quicker & Easier to install

TYPE 17



ECKO-FRIENDLY
PACKAGING

DRIVER BIT
EXCLUDED

■ Features & Benefits

- **HEAD**
Countersunk
- **DRIVE**
TX drive. Allows higher torque transmission than other drive systems enabling fastenings to be tighter and therefore more secure.
- **DOUBLE LOCKING THREAD**
Prevent pull out up to 50%
- **T-REX TEETH**
Quicker & Easier to install
- **TYPE 17**
Self-piercing predrilling
- **FINISH**
OutDoor XGuard




OutDoor XGuard Premium Coating.
Salt Spray Test exceeds 1000 hours.
Independently tested in New Zealand.

DIA.	LENGTH (mm)	PRODUCT CODE	DRIVE	FINISH	T-REX TEETH	POINT	PCS/PACK	GS1 BARCODE
OutDoor XGuard								
M8	100	TCCM8100L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051802858
	120	TCCM8120L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051802865
	140	TCCM8140L-50	TX Drive T40	XGuard	✓	Type 17	50	9420051802872
M10	100	TCCM10100L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051802889
	120	TCCM10120L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051802896
	140	TCCM10140L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051802902
	160	TCCM10160L-50	TX Drive T50	XGuard	✓	Type 17	50	9420051802919

ECKO T-REX17®

HEX HEAD SCREWS

Hex Drive - Yellow Zinc & C4 Galvanised

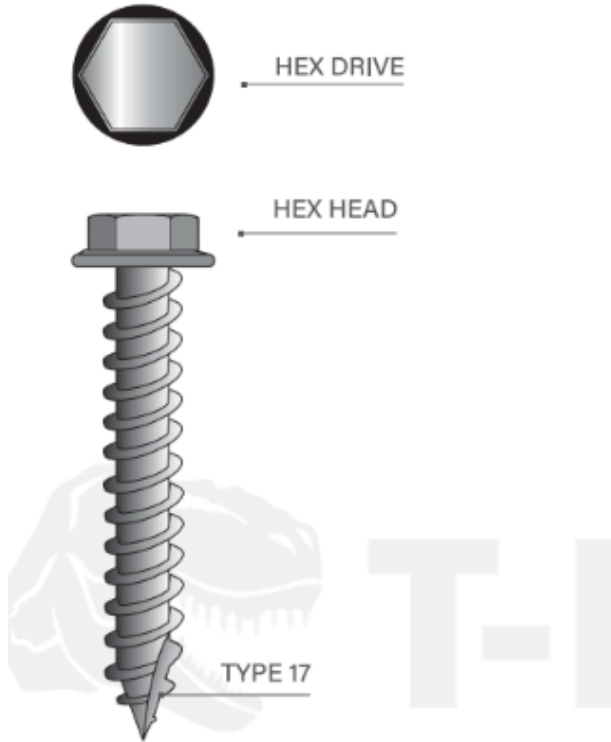

ECKO T-REX17®

HEX HEAD SCREWS NEO WASHER

Hex Drive - C4 Galvanised



DIA.	LENGTH (mm)	PRODUCT CODE	HEAD
Yellow Zinc			
12G	35	HXYZT12G35-200	5/16 Hex Head
14G	35	HXYZT14G35-200	3/8 Hex Head
C4 Galvanised			
12G	25	HXC4T12G25-100	5/16 Hex Head
	35	HXC4T12G35-200	5/16 Hex Head
	40	HXC4T12G40-100	5/16 Hex Head
	50	HXC4T12G50-100	5/16 Hex Head
14G	35	HXC4T14G35-200	3/8 Hex Head
	65	HXC4T14G65-100	3/8 Hex Head
	75	HXC4T14G75-100	3/8 Hex Head
	100	HXC4T14G100-100	3/8 Hex Head


DIA.	LENGTH (mm)	PRODUCT CODE	HEAD	FINISH
C4 Galvanised				
10G	25	HXC4T10G25N-100	5/16 Hex Head	C4 Galvanised
	50	HXC4T12G50N-100	5/16 Hex Head	C4 Galvanised
12G	65	HXC4T12G65N-100	5/16 Hex Head	C4 Galvanised
	65	HXC4T12G65N-200	5/16 Hex Head	C4 Galvanised
	55	HXC4T14G55N-100	3/8 Hex Head	C4 Galvanised
14G	65	HXC4T14G65N-100	3/8 Hex Head	C4 Galvanised
	75	HXC4T14G75N-100	3/8 Hex Head	C4 Galvanised
	75	HXC4T14G75N-200	3/8 Hex Head	C4 Galvanised
	90	HXC4T14G90N-100	3/8 Hex Head	C4 Galvanised
	100	HXC4T14G100N-100	3/8 Hex Head	C4 Galvanised
	100	HXC4T14G100N-200	3/8 Hex Head	C4 Galvanised

AVAILABLE IN STAINLESS STEEL




DYNAMIC FASTENERS

Gun Nails with AM Fuel Cells

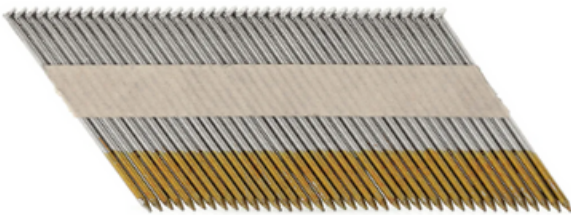

75mm & 90mm Brights 3000 x 3 AM Fuel Cells

50mm, 65, 75mm & 90mm D head Galv 3000 x 3 AM Fuel Cells

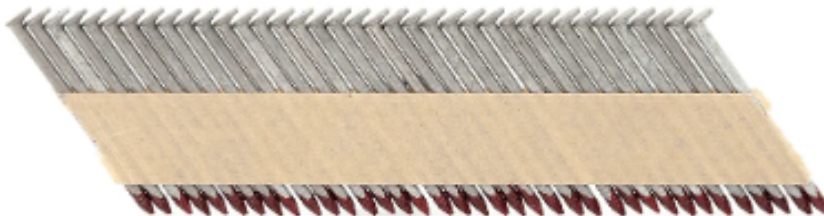

50mm, 65, 75mm & 90mm Round head Galv 3000 x 3 AM Fuel Cells

50mm, 65 & 75mm Round head Stainless 1000 x 1 AM Fuel Cells




3.33 x 38 Joist Hanger Nails Galv - 2000 x 1 AM Fuel Cells

3.33 x 38 Joist Hanger Nails Stainless - 2000 x 1 AM Fuel Cells



DYNAMIC FASTENERS

Coil Nails

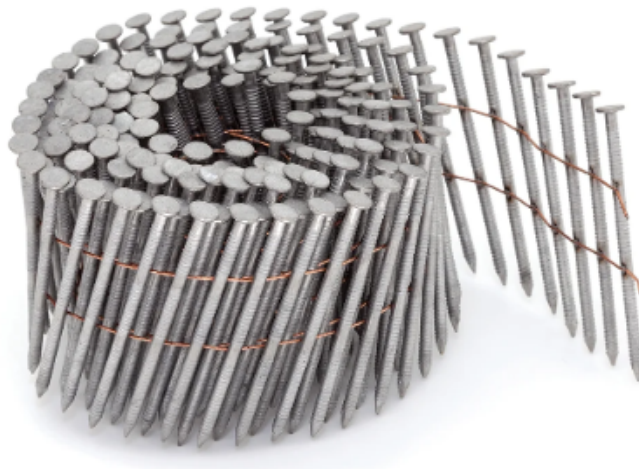

Code	Item Description	Unit	Quantity
CNHP-2557R	Wire Coil - HD Galvanised Ring 2.5 x 57mm, Fencing	Carton	9,000
CNHP-2850R	Wire Coil - HD Galvanised Ring 2.8 x 50mm, Ply Bracing	Carton	6,000
CNHP-2865R	Wire Coil - HD Galvanised Ring 2.8 x 65mm	Carton	6,000
CNHP-3175R	Wire Coil - HD Galvanised Ring 3.15 x 75mm	Carton	4,500

Code	Item Description	Unit	Quantity
HDG-2865R	Plastic Sheet - HD Galvanised Ring 2.8 x 65mm, Decking, Wnd & Dr Frames	Carton	3,000
HDG-3175R	Wire Coil - HD Galvanised Ring 3.15 x 75mm, Weather Board	Carton	3,000

Code	Item Description	Unit	Quantity
HSG-2527R	Plastic Sheet - EG Twist Shank 2.5 x 27mm, Tile and Slate Underlay	Carton	9,600



DYNAMIC FASTENERS



APACH CN-565S Coil Nailer

15° Wire and Plastic Sheet Collated Nails. Length: Wire 45-65mm, Plastic Sheet: 32-65mm. Shank Diameter: 2.9mm.

Suitable for: Packaging, Crating, Pallets, Siding, Sheathing, Paneling, Fencing, Industrial, Pre-Fabricated Housing.

- Accepts both wire & plastic sheet collated nails
- Powerful motor drives 250 to 400 nails continuously
- Tool free depth adjustment
- Sequential fire trigger available



FORCE CN-90WP Coil Nailer

Engineered to accept both wire collated 2.5mm-3.3mm and plastic sheet collated 2.5mm-2.9mm nails. These nails are generally available in 50mm-90mm lengths

Suitable for: Construction work (ex: Siding, roofing and sheathing), Wooden Cases, Light pallets, Wooden Furniture, Wooden Sashes and other Wood Products

- 360 exhaust deflector allows exhaust of air in any direction
- Depth of drive adjustment to countersink or flush drive nails
- Lightweight design prevents arm fatigue for user
- Drives wire and plastic sheet collated nails



FORCE Compressor TAT-2018HN

Voltage (V/Hz): 230V/50Hz
 Power: 2.0HP (oil free silent) Noise: 69dba
 Revolution: 2800RPM/min
 Working Pressure: 7-9 bar
 Displacement: 221 L/Min, 130L/Min@6bar,
 Tank Cap: 16L
 External dimentions (WxDxH): 470x455x470mm
 N.W: 24KG
 G.W: 26KG



FORCE Compressor TAT-2520HN

Voltage (V/Hz): 230V/50Hz
 Power: 2.0HP (oil free silent) Noise: 69dba
 Revolution: 1420RPM/min
 Working Pressure: 8-10 bar
 Displacement: 240 L/Min, 170L/Min@6bar
 Tank Cap: 20L
 External dimentions (WxDxH): 800x540x520mm
 N.W: 41KG
 G.W: 44.6KG



FORCE Hose Reel 30m


High flow fittings with durable Hybrid Polymer air hose 8.5mm.

- Integrated control panel
- Strong rubber wheel
- Flexible rollcage for easy traveling
- 2 x couplings - more useful
- Pole industrial motor with 2 x longer lifetime
- Tool palette can fit with hose reel




DYNAMIC FASTENERS

Angle & Straight Brads with Paslode Gas

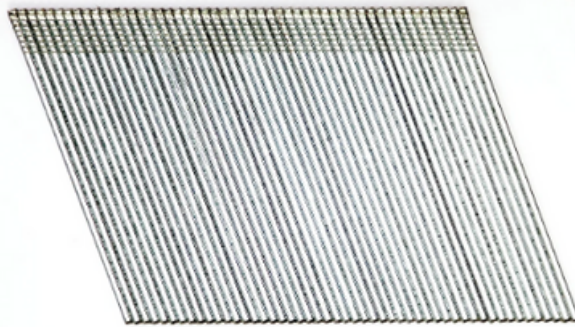

Code	Item Description	Unit	Quantity
AG-1632PL2	Angled 32mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,000
AG-1638PL2	Angled 38mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,000
AG-1645PL2	Angled 45mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,000
AG-1650PL2	Angled 50mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,000
AG-1663PL2	Angled 63mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,000

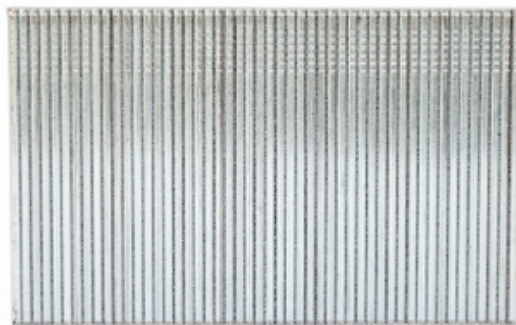

Code	Product Description	Unit	Quantity
BC-1625PL2	Straight 25mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1630PL2	Straight 30mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1635PL2	Straight 35mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1640PL2	Straight 40mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1645PL2	Straight 45mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1650PL2	Straight 50mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1657PL2	Straight 57mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500
BC-1663PL2	Straight 63mm Galvanised Brads 16Gauge + 2 Fuel Cells	Carton	2,500

Also Available in Stainless



BOSTIK

HYBRID SEALANTS

Seal N' Flex Facade Low modulus hybrid polyurethane facade sealant

Seal N' Flex Facade is a BRANZ appraised, professional quality, high performance, low VOC, weather resistant expansion sealant for building facade construction joints. Based on the latest hybrid polyurethane technology, this universal low modulus formula is designed to cure under the influence of humidity to form a durable elastic rubber seal.



Key features	Recommended uses
<ul style="list-style-type: none"> • BRANZ appraised, and passed Assure Quality Assessment • Excellent adhesion without primer to most, even damp surfaces • Neutral curing • Very low odour, low VOC • Permanently elastic with +/- 25% joint movement • Contains no isocyanates, solvents or silicones • Low shrinkage • Does not form bubbles while curing • Excellent resistance to UV, water and weather • Enhanced performance in extreme temperatures • Superior tooling capabilities • Available in sausage and cartridge • Paintable 	<ul style="list-style-type: none"> • In-situ concrete and render • Precast and tilt up panels • Brickwork and block work • Plasterboard face and paper lined recessed edges • Fibre cement sheet • Aluminium windows • GRC, fibreglass and most specialty panel systems • Painted wood • Stainless steel • Some plastics (refer to TDS) • Enamel

MS Safe Seal solvent-free, high performance MS construction sealant.

BRANZ appraised, multi-purpose, heavy duty, MS-based sealant for construction & building. Highly elastic and flexible. Green Star compliant – low VOC, odour-free, isocyanate-free and solvent free. Adheres to most common building substrates. Fully paintable. Available in cartridge and sausage in white, grey and black.



Key features	Recommended uses
<ul style="list-style-type: none"> • Meets NZBC E2/AS1 • BRANZ appraised: Appraisal No.705 (2016) • ISO 11600-F-25LM compliant • Fully paintable to DIN 52452, PT4 • Ideal for green buildings • Suitable for LOSP • Non slump • Easy to gun and tool • Total movement 50%(± 25%) • Very low shrinkage • One component 	<ul style="list-style-type: none"> • Sealing of building and expansion joints • Sealing in general construction • Sealing most building materials • Sealing tilt slabs • Sealing air seals • Not designed to seal immersed joints or below waterline applications • Primer: Prep M for non-porous and metal substrates, Prep P for porous substrates

SILICONE SEALANTS



Kitchen & Bathroom Silicone Mould-resistant, premium 100% silicone sealant

Neutral cure silicone sealant that provides a permanently flexible waterproof seal. Seals joints in wet and damp areas where resistance to the growth of mould and fungus is important. Available in cartridge in white and translucent.

Key features	Recommended uses
<ul style="list-style-type: none"> • Neutral cure – non-corrosive • Waterproof • Mould resistant • Good adhesion • Stays permanently flexible 	<ul style="list-style-type: none"> • Kitchen and bathroom fixtures • Glass, fibreglass, ceramic tile grouting • Vitreous enamel and most laminated surfaces



Roof & Gutter Silicone Weatherproof, premium 100% silicone sealant

Waterproof, weatherproof, permanently flexible neutral cure sealant. Excellent adhesion to common construction materials and metals. Will not corrode bare metal. Available in cartridge in translucent.

Key features	Recommended uses
<ul style="list-style-type: none"> • Neutral cure – non-corrosive • Excellent adhesion • Stays permanently flexible – joint movement capability of $\pm 25\%$ • Interior/exterior • Excellent UV and weather resistance • Low odour – ideal for green builds 	<ul style="list-style-type: none"> • Indoor and outdoor application • Metal roofing systems • Metal water tanks (not immersion) • Spouting, flashings and down pipes • Lap joints in Zinalume®, Colorbond® and other decorative sheet metal • Skylights • Metal and PVC flues/extraction units • Air conditioning ducting • Sheet metal fabrication • Pipe or sprinkler system penetrations and plumbing applications

FIRE RATED SEALANTS



FireBan One Fire & acoustic rated polyurethane construction sealant

Intumescent, low modulus, Class A polyurethane sealant, for fire rating of jointing of concrete, precast panels, block and brick work, drywall systems, electrical cables and pipe penetrations, in conjunction with other systems such as fire collars, board systems, pillows and fire-rated mortars. When cured, forms a tough, flexible fire-rated seal capable of cyclic expansion and compression movement of 50% ($\pm 25\%$) of the original installed joint width. Available in Sausage only in Grey. Additional colours available in batch quantities.

Key features	Recommended uses
<ul style="list-style-type: none"> • Fire rated up to 4 hours • Acoustic rated • Retains its original properties even after years of weather and UV exposure • Excellent weatherability • Paintable (refer limitations) • Non-staining • One component 	<ul style="list-style-type: none"> • Interior and exterior surfaces • Residential, commercial and heavy commercial applications • Insitu walls and floors • Precast and tilt-up panels • Brickwork and blockwork • Rendered masonry • Concrete • Plasterboard (Fire rated and acoustic rated) • Fibre cement sheet (Fire rated and acoustic rated) • Approved for use in many GIB® acoustic rated systems (refer document Lt0012012071A – MJC Acoustic Sealant Opinions)

PU ADHESIVE



Alpha Grip 1 hour cure foaming PU construction adhesive


Solvent-free, thixotropic, quick setting, moisture cured D4 polyurethane adhesive. Alpha Grip is stronger than wood after one hour - when fully cured has an extremely strong bond with excellent resistance to water, weathering, ageing conditions. Foams slightly to fill gaps and cracks. Tested and approved for use with Laminex Strandfloor. Available in cartridge only.

Key features	Recommended uses
<ul style="list-style-type: none">• Certified to EN204 D4• Very high bond strength• Non flammable• Solvent free• One hour set• One component	<ul style="list-style-type: none">• Flooring and general construction• For bonding porous to porous and porous to non-porous substrates such as wood, plasterboard, fibrous cement, metal, EPS foam, concrete, brick, melamine, various plastics (testing is recommended) and many other common substrates providing one or both of the surfaces contain moisture



A gun-grade, high quality polyurethane expansion foam, with a unique low post-expansion formula, lowering pressure on joint sides.

- Gun grade
- Very high yield
- Mould and moisture resistant
- Homogenous dense structure
- Minimal post-expansion



MASONS

Designed Smart, Built Tough.



Choose the right Flexible Air Barrier for your build



UNI

**UPTO
90
DAYS**

UV PROTECTION



UNI PLUS

**UPTO
90
DAYS**

UV PROTECTION



UNI PRO

**UPTO
150
DAYS**

UV PROTECTION

	UNI	UNI PLUS	UNI PRO
UV Resistance	90 days	90 days	150 days
Structure	3 layers	3 layers	3 layers
Fire retardancy	No	Yes	No
Colour of substrate	Blue external / black internal	Blue external / white internal	Blue external / white internal
Roll Size	2.74m x 18.25m = 50m ²	2.74m x 18.25m = 50m ²	2.74m x 18.25m = 50m ²

Barricade WD

Self-Adhesive Weather-Resistive Barrier



Barricade WD is a self-adhesive, weather-resistive barrier that may be used over a variety of vertical rigid substrates on both residential and commercial buildings.

Barricade WD is designed to shed water, yet freely pass water vapour. It will block the movement of air and cover all fixings and joints in the underlying substrate.

It is manufactured by thermally bonding outer spunbonded layers to an inner layer of microporous poly propylene film, coated with pressure-sensitive advanced poly-acrylic adhesive, offering superior adhesion to a variety of typical building materials.

Barricade WD may be applied over many common construction rigid substrates and there are no height restrictions. Once exterior elements (the roof, soffit lining and joinery) have been installed, and the rigid underlay has been covered with Barricade WD, then interior works can carry on inside without the cladding being in place for up to 5 months.* Interior and exterior trades can work in parallel to speed up programmes.

Masons Barricade WD contributes to the building moisture management design. It provides a substantial secondary defense against intrusion of moisture and air for the life of the building.

* Maximum MC % requirements of the bottom plate must be met.

<p>150 DAYS</p> <p>UV & WEATHER PROTECTION Pre-Cladding</p>	 <p>HIGHLY WATER RESISTANT</p>	 <p>STRONG Suitable for all Wind Zones</p>	 <p>BREATHABLE Passes Water Vapour Out</p>	 <p>ADVANCED POLY-ACRYLIC ADHESIVE</p>	 <p>AIR BARRIER To Air and Moisture</p>
---	--	--	--	--	---




MASONS

Designed Smart, Built Tough.



AIRTIGHT6x20	PEF ROD	6mm x 20m
AIRTIGHT6x50	PEF ROD	6mm x 50m
AIRTIGHT8x20	PEF ROD	8mm x 20m
AIRTIGHT8x50	PEF ROD	8mm x 50m
AIRTIGHT10x20	PEF ROD	10mm x 20m
AIRTIGHT10x50	PEF ROD	
AIRTIGHT13x20	PEF ROD	13mm x 20m
AIRTIGHT13x50	PEF ROD	13mm x 50m
AIRTIGHT15x50	PEF ROD	15mm x 50m
AIRTIGHT20x20	PEF ROD	20mm x 20m
AIRTIGHT30x10	PEF ROD	30mm x 100m

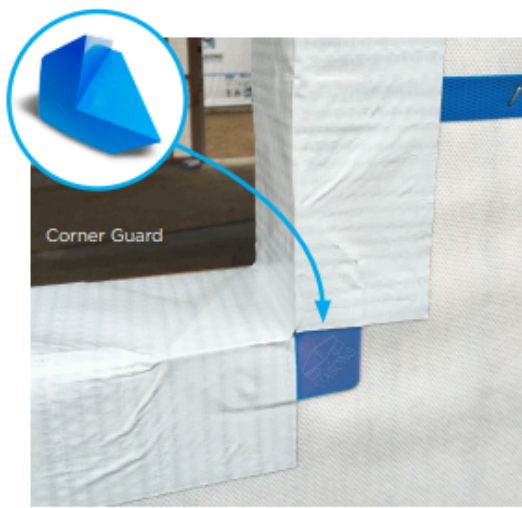

40 Below™ Ultra Sticky Great Value Everyday Flashing Tape

This classic, white facer tape has excellent adhesion in a wide range of conditions. It's no nonsense performance record, earns the trust of the professionals. Two layers required on sills for nail and screw sealability.

40 Below Ultra Sticky is compatible with most house wraps and sealants, but is not for use on UNI.

EXCELLENT ADHESION

TRUSTED & COMPATIBLE
With most Wraps and Sealants

THIN
No Build-Up in Corners



40 Below™ Platinum Premium Flashing Tape

Has advanced adhesive and silver foil water resistant facer to bring you an ultra-thin, pliable flashing tape with excellent adhesion. Two layers required on sills for nail and screw sealability.

Must be used on UNI, UNI PLUS and UNI PRO jobs for seam overlaps and head flashings.

PREMIUM ALUMINIUM FOIL FACER

ACRYLIC ADHESIVE
Aggressive and Dependable

ULTRA THIN
No Build-Up in Corners



40 Below™ Flex Super Premium Flashing Tape

Our most advanced, high performance flashing tape with cutting edge adhesive and a superior flexible facer.

Ultra thin and pliable with high water resistance and maximum UV protection. It is nail and screw sealable with just one layer.

Must be used on UNI, UNI PLUS, UNI PRO and Barricade Weather Defense jobs for seam overlaps and head flashings.

SUPER PREMIUM WHITE FACER

ADVANCED ACRYLIC ADHESIVE
Aggressive and Dependable

ULTRA THIN AND FLEXIBLE
No Build-Up in Corners



	40 Below Ultra Sticky	40 Below Platinum	40 Below Flex
Roll Sizes	75mm x 20m 100mm x 20m 150mm x 20m 230mm x20m	75mm x 20m 100mm x 20m 150mm x 20m 230mm x20m	75mm x 20m 100mm x 20m 150mm x 20m 230mm x20m
Facer Colour	White, woven PP	Aluminium foil	White, compound flexible
Sealant Compatible*	Yes	Yes	Yes
UV Resistance	180 days	180 days	270 days
Temperature Range - Application	-10°C to 40°C +	-10°C to 40°C +	-10°C to 40°C +
Layers on sill for Nail/Screw Sealability**	2	2	1
Codemark Certified***	Yes	Yes	Yes
Rigid Air Barrier****	Yes	Yes	Yes
Use on UNI, UNI PRO and UNI PLUS Seams, Overlaps and Head Flashings	No	Yes	Yes
Use on UNI and UNI PLUS Openings	No	Yes	Yes



MASONS
Designed Smart, Built Tough.

Barricade FR

Fire Retardant Building Wrap



A Barricade FR is a fire retardant building wrap suitable for all frame and cladding systems with or without cavity. It is Codemark Certified.

QUALITY BUILDING WRAP

High-quality synthetic material

A non-woven fire retardant, water resistant, breathable synthetic wall underlay for use under direct fixed and non-direct fixed wall cladding on timber framed and steel framed buildings. For use up to and including 'high' wind zones.

RESISTS UV EXPOSURE

High UV Qualities

Manufactured from high quality synthetic spun bonded material with high UV qualities to resist UV exposure for up to 60 days.



CODEMARK™
CM70072



FIRE RETARDANT

With unique anti-fungal properties



RESISTS UV EXPOSURE

For up to 60 days




CUSTOM BRANDING

Call your Masons Rep for details



DYNAMIC FASTENERS



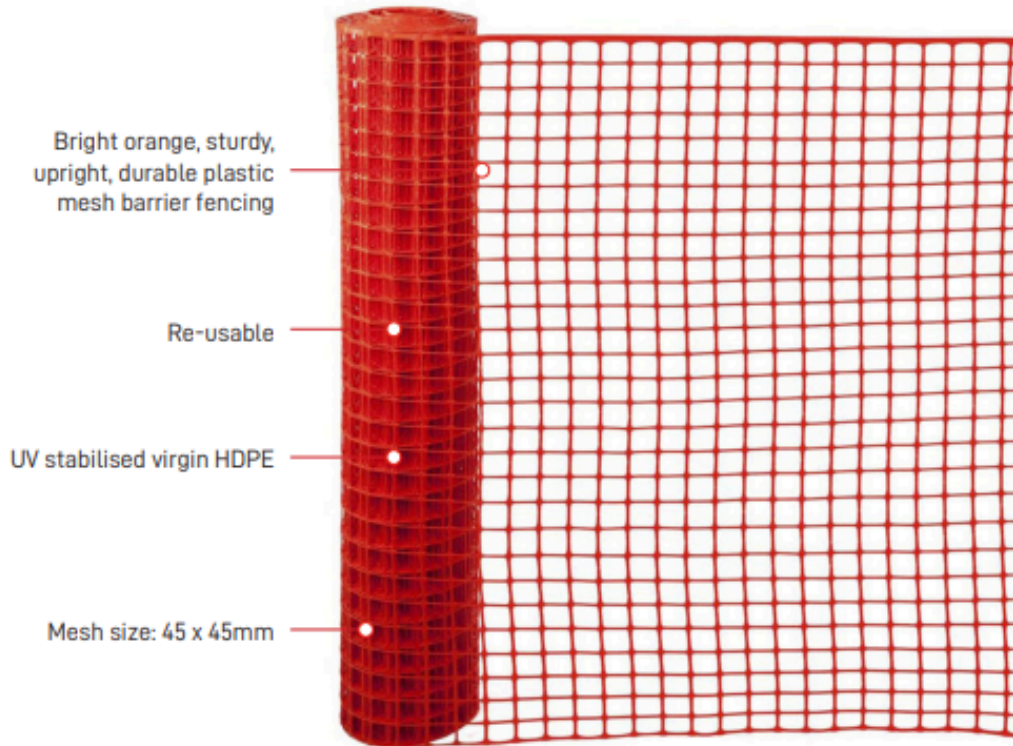

DURAMESH SAFETY FENCE

PRODUCT CODE: BW-DM
Duramesh 300gsm heavy duty safety fence, 30m roll

PERFORMANCE FEATURES

- + Bright orange, sturdy, upright, durable plastic mesh barrier fencing
- + Re-usable
- + UV stabilised virgin HDPE
- + Mesh size: 45 x 45mm
- + Roll size: 1.0m x 30mtrs
- + Weight: 9kg


SUITABLE FOR

- + Construction sites
- + Events
- + Temporary pedestrian control
- + Trenches and excavations
- + Restricted and hazardous areas

NEXUS HeightMaster Helmet Protection

NCHV

Modular AS/NZS 1801:1997 tested height safety helmet system, EN12492 rated

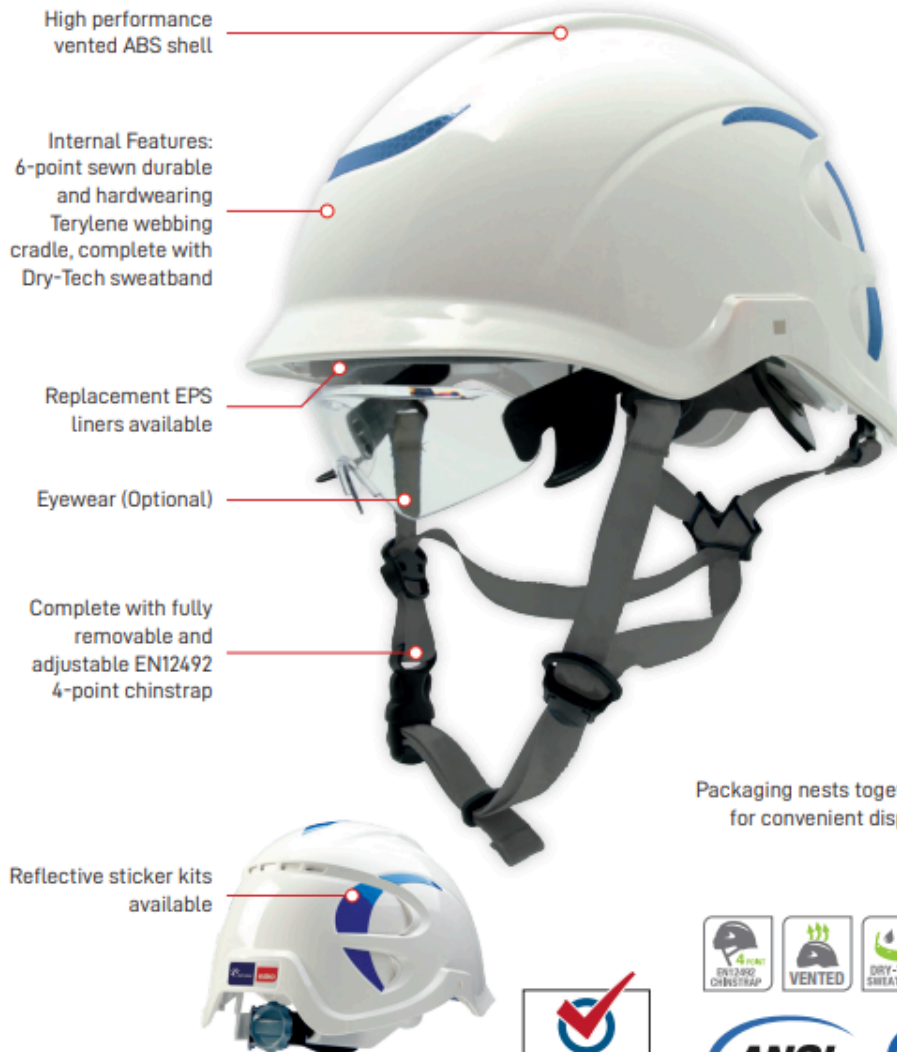

High performance vented ABS shell

Internal Features: 6-point sewn durable and hardwearing Terylene webbing cradle, complete with Dry-Tech sweatband

Replacement EPS liners available

Eyewear (Optional)

Complete with fully removable and adjustable EN12492 4-point chinstrap

Reflective sticker kits available



Packaging nests together for convenient display



Tested to the performance requirements of AS/NZS 1801:1997 Australian/New Zealand Standards



ANSI Z89.9 Type 1 Class C



CSA/CAN 294.1 Type 1 Class C



EN397



EN50365



EN12492

PERFORMANCE FEATURES

- + Modularity as standard
- + High performance ABS
- + Creative and stylish design
- + Premium Twist2Fit ratchet headband for secure fit
- + Premium Dry-Tech sweatband provides up to 40% faster drying and absorbs 4x more moisture
- + Enables -40°C Low Temperature
- + Micro peak for maximum upward visibility
- + Fully removable and adjustable chinstraps available
- + Tested to the performance requirements of AS/NZS 1801:1997

SUITABLE FOR

- + Construction
- + Scaffolding
- + Maintenance
- + Arborist
- + Silviculture
- + Recreation

WARRANTY

This helmet has an in-use life of up to 5 years from the date of issue to the user (i.e. removal from storage). It is recommended that after 5 years use the helmet is replaced. Excessive wear & tear and use in extreme environments can considerably reduce the lifespan of the product.

esko[®]



TUFF-NUT PINLOCK HARD HAT

TN1R

Tuff-Nut hard hat, short peak, vented,
6-point pinlock harness

Light, comfortable &
well-ventilated, short
peak design

Hard shell made of
UV-resistant ABS
materials to absorb
and resist high
impact

Ready with universal
accessory slots to fit
eye, face & hearing

Pinlock 6-point
suspension harness



PERFORMANCE FEATURES

- + Available in 9 shell colours: white, yellow, neon yellow, neon orange, orange, red, green, pink & blue
- + Light, comfortable and well-ventilated, short peak design
- + Hard shell made of UV-resistant ABS materials to absorb and resist high impact
- + Pinlock 6-point suspension harness
- + Easily detachable harness and fully adjustable to fit head sizes between 53cm to 66cm
- + Ready with universal accessory slots to fit eye, face and hearing protection products
- + Chinstrap and replacement sweatband available separately

SUITABLE FOR

- + Construction
- + Siteworks
- + Civil engineering
- + Industry
- + Agriculture

TUFF-NUT COLOURS

- + Available in the 9 shell colours of the TUFF-NUT range:

	White		Neon orange
	Neon yellow		Orange
	Yellow		Red
	Green		Blue
	Pink		



DYNAMIC FASTENERS

Hard Hat Ratchet Helmet Visor Combo

PRODUCT CODE: TN1R-VC

Hard Hat visor combo, with ratchet adjustable hard hat, browguard, earmuffs and AS/NZS rated extra high impact visor



Hard Hat visor combo, with ratchet adjustable hard hat, browguard, earmuffs and AS/NZS rated extra high impact

Light, comfortable & well-ventilated, short peak hard hat design

Easily detachable harness, fully adjustable to fit head sizes between 53cm to 66cm

Visor AS/NZS rated extra high impact, anti-fog & anti-scratch coated, 99.9% UV Protection Resistant to chemical splash, molten metal, hot solids and high impacts. Shade 5 welding visor available



PERFORMANCE FEATURES

- + Available in the 9 shell colours of the Tuff-Nut range: white, yellow, neon yellow, neon orange, orange, red, green, pink & blue
- + Light, comfortable & well-ventilated, short peak hard hat design
- + Shell made of UV-resistant ABS materials to absorb and resist high impact
- + 6-point ratchet adjustable suspension harness
- + Easily detachable harness, fully adjustable to fit head sizes between 53cm to 66cm
- + With browguard and Tuff-Shield clear visor
- + Earmuffs AS/NZS Class 5, protection for noise levels up to 110dB(A)
- + Visor AS/NZS rated extra high impact, anti-fog & anti-scratch coated, 99.9% UV Protection
- + Resistant to chemical splash, molten metal, hot solids and high impacts
- + Smoke and Shade 5 visors also available

TUFF-NUT COLOURS

- + Available in the 9 shell colours of the TUFF-NUT range:



SUITABLE FOR

- + Industry
- + Factory
- + Laboratory

Esko Combat Spec

AS/NZS 1337.1:2010 standards certified

Stylish wrap-around design with EVA 'Positive Seal', ideal for dusty environments

Meets USA Military ballistic eyewear standard—withstands steel bearing traveling at 400mph



Esko Combat safety eyewear, meets USA military ballistic eyewear standard, foam seal for dusty environments, anti-fog & anti-scratch coating, available in clear or smoke lens



AS/NZS1337.1:2010




Esko Velocity Spec

Anatomically shaped wrap-around lens offers a high degree of safety

Standards certified to AS/NZS 1337.1 medium impact

Food-safe, dielectric rated—no metal parts

Optically correct for greater visual accuracy and awareness

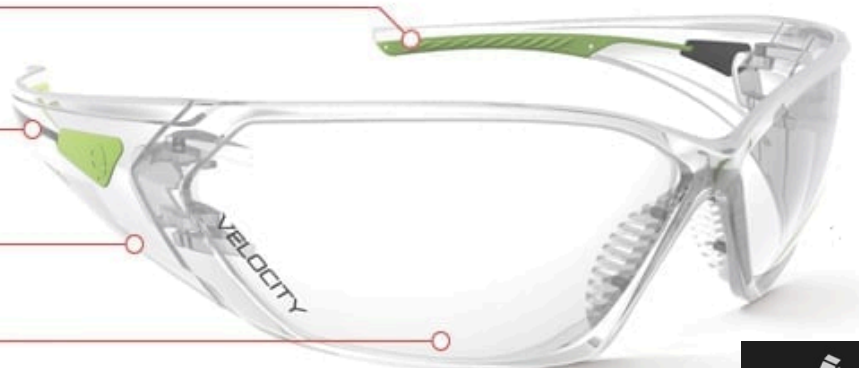

Esko Razor X320 Hi-Vis Green Cut 3 Glove

Hi-Vis cut resistant liner knitted from high-performance HPPE combined with stretchy spandex/polyester

Advanced yarn wrapping technology, maximising user comfort with a softer liner and less hand fatigue

Certified to protect to latest European EN388:2016 and American standards

Silicone-free PU foam coating—no risk of silicone contamination prior to painting metal parts



EN388
2016



4342B



Esko Razor X500 Cut 5 PU Dip Glove

Knitted from high-performance HPPE combined with stretchy spandex/polyester liner and PU palm coating

Razor X500 combines cut protection with comfort, flexibility and dexterity

Certified to protect to latest European standards Cut Level D


Superior grip. Performs in dry and wet conditions



EN388
2016



4X43D

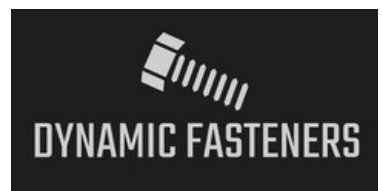

Esko Breathe Easy P2 Valved Mask



AS/NZS 1716



PERFORMANCE FEATURES

- + P2 rating for protection against mechanically and thermally generated particles
- + Recommended protection against Legionnaires disease when handling potting mix, etc
- + AIR8™ exhalation valve for extra air flow
- + Colour coded packaging for ease of identification
- + Dual straps give firm and comfortable fit
- + Box of 12

SUITABLE FOR

- + Sanding, grinding, drilling, sawing of timber or masonry
- + Legionnaires disease protection
- + Paint preparation
- + Plasterboard fixing and stopping
- + Agricultural dust from grain harvesting, potting mix, pollen, hay, feathers, animal feed
- + Insulation installation
- + Packing, warehousing
- + Vehicle repair
- + Welding (not galvanised or aluminium)
- + Food processing
- + Mining
- + Construction



DYNAMIC FASTENERS

ESKO AIR8 FULL FACE SILICONE RESPIRATOR

8900

Introducing the Esko AIR8 8900 Full Face Silicone Respirator – the ultimate in respiratory protection. Crafted with precision and user comfort in mind, this respirator boasts a silicone face seal designed to conform to various face shapes, for a secure and comfortable fit.

With a generously sized lens offering a wide field of view and exceptional visibility, this respirator enhances safety and awareness on the job. Plus, its external and internal anti-fog coatings keep your vision crystal clear, even in challenging conditions.

The Esko AIR8 8900 Respirator is engineered for your advantage, installation and disassembly of filters is swift and straightforward, ensuring you're easily prepared for whatever comes your way.

Elevate your safety and protection with the Esko AIR8 8900 – your reliable partner in respiratory health.



MATERIALS

Face Mask Body: Silicone

Mask Valve & Fittings: Silicone / Nylon

Strap Clips: Nylon

Grill Locking Turn Buckle and Boss: POM

Packaging: Recyclable cardboard box

FEATURES

- Contents: 1x 8900 Full Face Respirator, Draw String Storage Bag, 2 x 805 Respirator Cleaning Wipes
- Silicone face seal, to fit with different face shapes
- Adjustable head harness assembly - six point adjustable silicone harness
- Large lens-wide field of view and excellent visibility
- External and internal anti-fog coating
- Convenient, quick installation & disassembly of filters
- Compatible with AIR8 8000 Series Filters:
P2 Particulate Pre-Filters **8010**, P3R Particulate Filters **8020**, A2 Cartridge Filters **8030**, A1B1K1E1 Cartridge Filters **8040**

CERTIFICATIONS

- AS/NZS Standard 1716:2012
- European Standard EN 140:1998, PPE Regulation(EU) 2016/425.





ESKO AIR8 P2 HALF MASK

8600

Select the AIR8 8000 Series for premium protection and unparalleled convenience, perfectly suited for the rigors of tough work environments.

The 8600 Half Mask is compatible with the full range of AIR8 filters and accessories.

FEATURES

- Contents: 1x 8600 Half Face Respirator, 1x Sealable Storage Bag, 2x 805 Hygiene Wipes
- Secure silicone comfort
- High efficiency fresh-flow exhalation design reduces breathing resistance, heat and moisture
- Ergonomic design reduces fogging of eye protection
- Drop-down feature for added convenience
- Lightweight for all day comfort
- Adjustable head cradle
- Available in sizes: small, medium, large
- Compatible with AIR8 8000 Series Filters: P2 Particulate Pre-Filters **8010**, P3R Particulate Filters **8020**, A2 Cartridge Filters **8030**, A1B1K1E1 Cartridge Filters **8040**

MATERIALS

Face Mask Body: Silicone

Mask Valve & Fittings: Silicone / Nylon

Strap Clips: Nylon

Grill Locking Turn Buckle and Boss: POM

Packaging: Resealable Polybag

APPLICATIONS

- Oil & Gas
- Energy
- Welding
- Shipbuilding
- Painting
- Construction
- Mining
- Machinery
- Pharmaceutical
- Chemical

CERTIFICATIONS

- AS/NZS Standard 1716:2012
- European Standard EN 140:1998, PPE Regulation (EU) 2016/425.



FILTER OPTIONS



8010 P2 Particulate Pre-Filters

For use with AIR8 filter cartridges 8030 & 8040 in conjunction with retainer 810. Provide P2 protection against solid, liquid and aerosol particles (Please refer to use limitations) - extends the performance of filter cartridges.

CODE: **8010**

STANDARD: AS/NZS Standard 1716:2012

CLASS: **P2**

HAZARD: Solid, liquid and aerosol particles



8020 P3R Particulate Filters -nuisance level organic vapour

Provide P3 R protection against solid and aerosol liquid particles, ozone and nuisance level acid gas and organic vapours with low vapour pressure (Please refer to use limitations).

CODE: **8020**

STANDARD: AS/NZS Standard 1716:2012

CLASS: **P3R**

HAZARD: Nuisance level organic vapour



Esko Titan 340 SMS Coverall Type 5/6



Approved for asbestos removal

Latest SMS fabric technology—ideal for working in warmer environments

Multi-layered PPSB for advanced fabric strength, tear and puncture resistance

MBPP fabric filters 99.8% of particles sized 0.5-1 μ m

Meets EN1073-2 for protection against radioactive particulate contamination. Approved in accordance with EN1149-5 antistatic standard

PRODUCT CODE: T340

Titan 340 SMS Coverall Type 5/6

EN1073-2



EN13034



Type 6


EN ISO 13982-1



Type 5



DYNAMIC FASTENERS

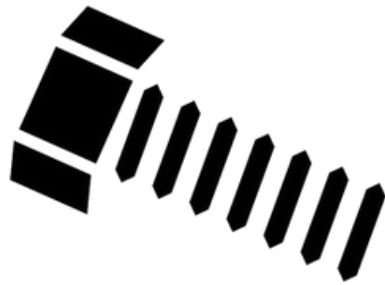

DYNAMIC FASTENERS

Ready to Order? Open an Account?

Call us on 0212024942

Text us on 0212024942

Whatsapp

Viber

sales@dynamicfasteners.co.nz

**We provide free delivery between
Drury @ Silverdale**

**Conditions apply for large projects outside
of these areas.**